



(+62) 821-2105-7114 negi@hka.co.id
(021) 2986-0544 www.elevatindo.com



XGA18K


FEATURES

- 1.83m × 0.76m working platform
- 12V DC auxiliary power
- 4WD, 2WS
- Axle balance system
- Emergency power unit
- Automatic platform leveling system
- 360° turntable rotation
- Telematics pre-interface
- Fully Proportional Multi-Function Controls
- Hydraulic oil cooler
- Drive enable
- Hourmeter screen
- Tilt alarm
- Lift and lower alarm
- Lockable turntable cover
- Positive traction drive
- Ground control box
- Steering lever control
- Flashing beacon

OPTIONS

- Foam-filled rough terrain tires
- Tool tray
- Platform working light
- Air line to platform
- AC power to platform

Work Curve Graph

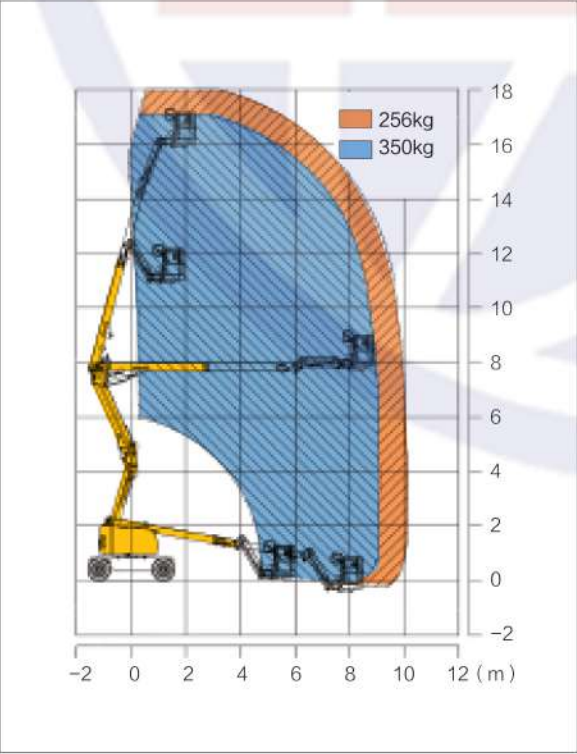

PARAMETER

Item	Unit	XGA18K
Dimension		
a Overall length (stowed size)	mm	7575
Overall length (transportation size)	mm	5700
b Overall width	mm	2320
c Overall height	mm	2380
Platform dimension	mm	1830 × 760 × 1150
d Wheel base	mm	2360
Max. working height	mm	18015
Max. height of platform	mm	16015
Max. working radius	mm	10270
Performance		
Max. carrying weight	kg	256 (Unrestricted)/350 (restricted)
Travel speed (stowed)	km/h	5.5
Travel speed (elevated/extended)	km/h	1
No. 1 boom luffing range	°	0~65
No. 2 boom luffing range	°	-11° ~75°
Jib luffing range	°	-60° ~70
Turntable rotation angle	°	360 continuous
Tailswing	mm	0
Platform rotation angle	°	160
Min. turning radius (outside)	mm	≤4700
Min. turning radius (inside)	mm	≤1900
Total weight	kg	8700
Max. gradeability (counterweight uphill)	%	45
Max. gradeability (counterweight downhill)	%	30
Power source		
Engine model	/	Yuchai YCF3050-T302 / Kubota V2403-M-DI-ET04e
Engine rated power	kW	36.8 / 36.5
Hydraulic tank capacity	L	85
Hydraulic system capacity	L	170
Fuel tank capacity	L	65

