



(+62) 821-2105-7114 negi@hka.co.id
 (021) 2986-0544 www.elevatindo.com




XG0607DC

FEATURES

- 2 rear driving wheels
- 25% theoretical gradeability—stowed/lowered position
- Battery charge indicator and diagnostic display for faults
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Rear wheel multi-disc brakes
- Manual brake release system
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter screen
- Lift and lower alarm
- Dual flashing beacons
- Drive alarm
- Overload alarm

OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform
- Li-battery

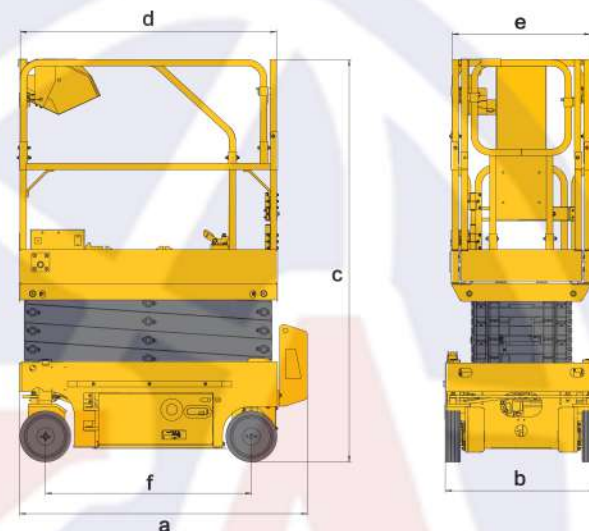

PARAMETER

Item	Unit	XG0607DC
Dimension		
Max. working height	m	5.9
Max. platform height	m	3.9
a Overall length	mm	1450
Overall length (without ladder)	mm	1290
b Overall width	mm	760
c Overall height	mm	2020
Overall height (platform folded)	mm	1660
d × e Platform size (Length × Width)	mm	1290 × 700 × 1209
Extended platform size (Length × Width)	mm	600
Min. ground clearance (Pit protector rising / descending)	mm	15/65
Tire	mm	254 × 76
f Wheel base	mm	1030
Performance		
Occupant capacity	/	2
Max. rated load	kg	240
Extended platform rated load	kg	100
Travel speed (Stowed / Elevated)	km/h	4 / 0.5
Min. turning radius (inside / outside)	m	0.4 / 1.55
Work platform raising / lowering time	s	27-37 / 23-33
Max. gradeability	%	25
Tilt alarm angle (side / forward and backward)	°	1.5/3
Total weight	kg	900
Power source		
Battery	/	Maintenance-free lead-acid battery / Lithium battery
Battery voltage	V	24/25.6
Battery capacity	Ah	75/80