



(+62) 821-2105-7114 negi@hka.co.id
 (021) 2986-0544 www.elevatindo.com



8m
SERIES

XG0807AC(DC)
XG0807ACW(DCW)


XG0807HD
XG0807HDW

FEATURES

- AC motor walking (XG0807AC, XG0807ACW)
- Hydraulic motor walking (XG0807HD, XG0807HDW)
- Two front driving wheels
- 25% theoretical gradeability—stowed/lowered position
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Manual brake release system
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter screen
- Dual flashing beacons
- Drive alarm
- Overload alarm

OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform
- Li-battery

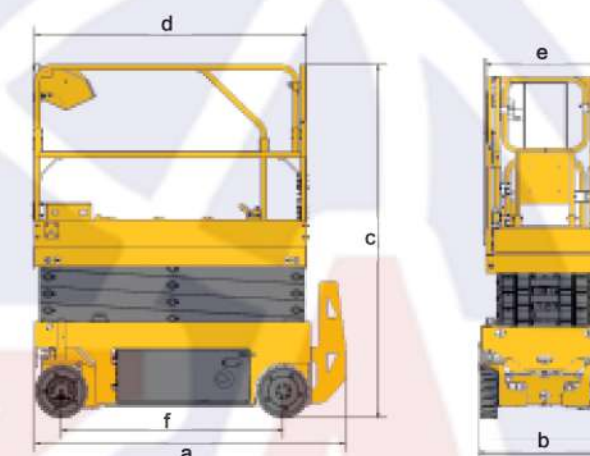

PARAMETER

Item	Unit	XG0807AC(DC)	XG0807HD	XG0807ACW(DCW)	XG0807HDW
Dimension					
Max. working height	m	7.8	7.8	7.8	7.8
Max. platform height	m	5.8	5.8	5.8	5.8
a Overall length	mm	1900	1900	1900	1900
Overall length (without ladder)	mm	1680	1680	1680	1680
b Overall width	mm	760	760	810	810
c Overall height	mm	2160	2160	2160	2160
Overall height (platform folded)	mm	1830	1830	1830	1830
d × e Platform size (Length × Width)	mm	1670 × 740 × 1243	1670 × 740 × 1243	1670 × 740 × 1243	1670 × 740 × 1243
Extended platform size (Length × Width)	mm	900	900	900	900
Min. ground clearance (Pit protector rising / descending)	mm	20 / 71	20 / 71	20 / 71	20 / 71
Tire	mm	323 × 100	323 × 100	323 × 100	323 × 100
f Wheel base	mm	1360	1360	1360	1360
Performance					
Occupant capacity	/	2	2	2	2
Max. rated load	kg	230	230	230	230
Extended platform rated load	kg	115	115	115	115
Travel speed (stowed / elevated)	km/h	4.5/0.8	3/0.8	4.5/0.8	3/0.8
Min.turning radius (inside / outside)	m	0 / 1.75	0 / 1.75	0 / 1.75	0 / 1.75
Work platform raising / lowering time	s	13-30 / 25-35	13-30 / 25-35	13-30 / 25-35	13-30 / 25-35
Max. gradeability	%	25	25	25	25
Tilt alarm angle (side / forward and backward)	°	1.5 / 3	1.5 / 3	1.5 / 3	1.5 / 3
Total weight	kg	1550	1550	1580	1580
Power source					
Battery	/	Maintenance-free lead-acid battery / Lithium battery			
Battery voltage	V	24/25.6			
Battery capacity	Ah	280/160			