



(+62) 821-2105-7114 negi@hka.co.id
 (021) 2986-0544 www.elevatindo.com



10m
SERIES

XG1008AC(DC)
XG1012AC(DC)


XG1008HD
XG1012HD

FEATURES

- Two front driving wheels
- 25% theoretical gradeability—stowed/lowered position
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Manual brake release system
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter screen
- Dual flashing beacons
- Drive alarm
- Overload alarm

OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform
- Li-battery

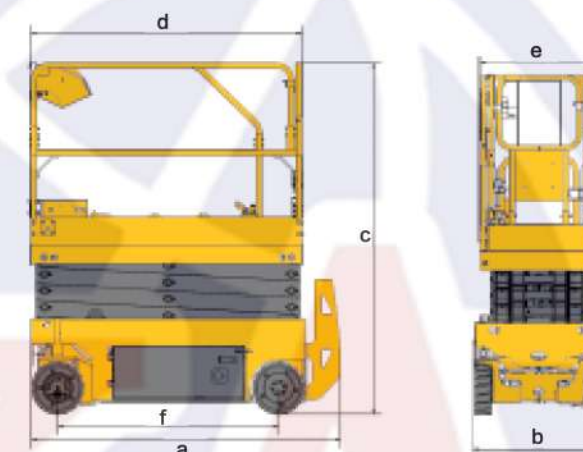

PARAMETER

Item	Unit	XG1008AC(DC)	XG1008HD	XG1012AC(DC)	XG1012HD
Dimension					
Max. working height	m	10		10	
Max. platform height	m	8		8	
a Overall length	mm	2477		2477	
Overall length (without ladder)	mm	2280		2267	
b Overall width	mm	810		1170	
c Overall height	mm	2335		2335	
Overall height (platform folded)	mm	2005		2005	
d × e Platform size (Length × Width)	mm	2270 × 810 × 1246		2270 × 810 × 1246	
Extended platform size (Length × Width)	mm	900		900	
Min. ground clearance (Pil protector rising / descending)	mm	20/100		20/110	
Tire	mm	381 × 127		381 × 127	
f Wheel base	mm	1877		1877	
Performance					
Occupant capacity	/	2		2	
Max. rated load	kg	230		450	
Extended platform rated load	kg	115		115	
Travel speed (Stowed / Elevated)	km/h	3.5/0.8		4/0.8	
Min.turning radius (inside / outside)	m	0/2.3		0/2.3	
Work platform raising / lowering time	s	29-40/34-45		29-40/34-45	
Max. gradeability	%	25		25	
Tilt alarm angle (side / forward and backward)	°	1.5/3		1.5/3	
Total weight	kg	2260		2680	
Power source					
Battery	/	Maintenance-free lead-acid battery / Lithium battery		Maintenance-free lead-acid battery / Lithium battery	
Battery voltage	V	24/25.6		24	
Battery capacity	Ah	280/210		280	