



(+62) 821-2105-7114 negi@hka.co.id
 (021) 2986-0544 www.elevatindo.com




14^m SERIES XG1412AC(DC) XG1412HD

FEATURES

- Two front driving wheels
- 25% theoretical gradeability—stowed/lowered position
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Manual brake release system
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter screen
- Dual flashing beacons
- Drive alarm
- Overload alarm

OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform
- Li-battery

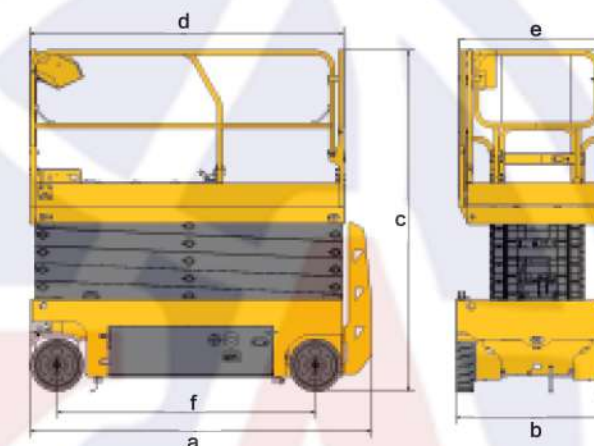

PARAMETER

Item	Unit	XG1412AC(DC)	XG1412HD
Dimension			
Max. working height	m	13.8	
Max. platform height	m	11.8	
a Overall length	mm	2477	
Overall length (without ladder)	mm	2267	
b Overall width	mm	1190	
c Overall height	mm	2610	
Overall height (platform folded)	mm	2060	
d × e Platform size (Length × Width)	mm	2277 × 1120 × 1263	
Extended platform size (Length × Width)	mm	900	
Min. ground clearance (Pit protector rising / descending)	mm	20/100	
Tire	mm	381 × 127	
f Wheel base	mm	1877	
Performance			
Occupant capacity	/	2	
Max. rated load	kg	320	
Extended platform rated load	kg	115	
Travel speed (Stowed/Elevated)	km/h	4/0.8	
Min. turning radius (inside /outside)	m	0/2.3	
Work platform raising/lowering time	s	45-70/52-78	
Max. gradeability	%	25	
Tilt alarm angle (side/forward and backward)	°	1.5/3	
Total weight	kg	3150	
Power source			
Battery	/	Maintenance-free lead-acid battery / lithium battery	
Battery voltage	V	24/25.6	
Battery capacity	Ah	280/210	