



(+62) 821-2105-7114    negi@hka.co.id  
 (021) 2986-0544    www.elevatindo.com




## FEATURES

- Two front driving wheels
- 25% theoretical gradeability—stowed/lowered position
- Battery charge indicator and diagnostic display
- Manual platform lowering valve
- Both platform and ground control panel with emergency stop button
- Manual brake release system
- Solid non-marking tires
- Mobile pothole protection
- Tilt alarm
- Hourmeter screen
- Dual flashing beacons
- Drive alarm
- Overload alarm

## OPTIONS

- Platform working light
- Air-line to platform
- AC power to the platform
- Li-battery

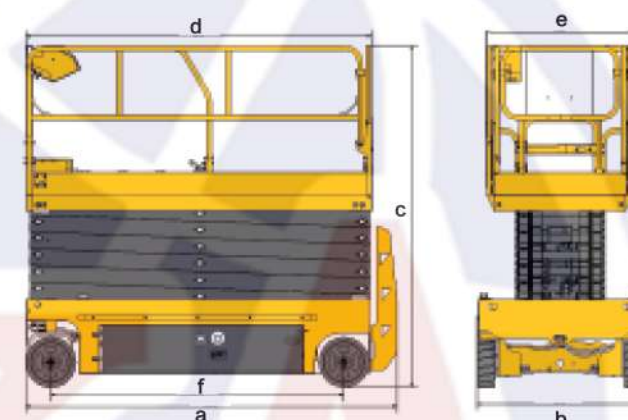

## PARAMETER

Item	Unit	XG1614AC(DC)	XG1614HD
<b>Dimension</b>			
Max. working height	m	15.8	
Max. platform height	m	13.8	
a Overall length	mm	2840	
Overall length (without ladder)	mm	2630	
b Overall width	mm	1390	
c Overall height	mm	2721	
Overall height (platform folded)	mm	2175	
d × e Platform size (Length × Width)	mm	2640 × 1120 × 1263	
Extended platform size (Length × Width)	mm	900	
Min. ground clearance (Pit protector rising / descending)	mm	20/77.5	
Tire	mm	381 × 127	
f Wheel base	mm	2240	
<b>Performance</b>			
Occupant capacity	/	2	
Max. rated load	kg	350	
Extended platform rated load	kg	115	
Travel speed (stowed/elevated)	km/h	4/0.8	
Min. turning radius (inside/outside )	m	0/2.65	
Work platform raising/lowering time	s	65-82 / 61-80	
Max. gradeability	%	25	
Tilt alarm angle (side/forward and backward)	°	1.5/3	
Total weight	kg	3680	
<b>Power source</b>			
Battery	/	Maintenance-free lead-acid battery / lithium battery	
Battery voltage	V	24/25.6	
Battery capacity	Ah	280/210	