




(+62) 821-2105-7114    negi@hka.co.id  
 (021) 2986-0544    www.elevatindo.com

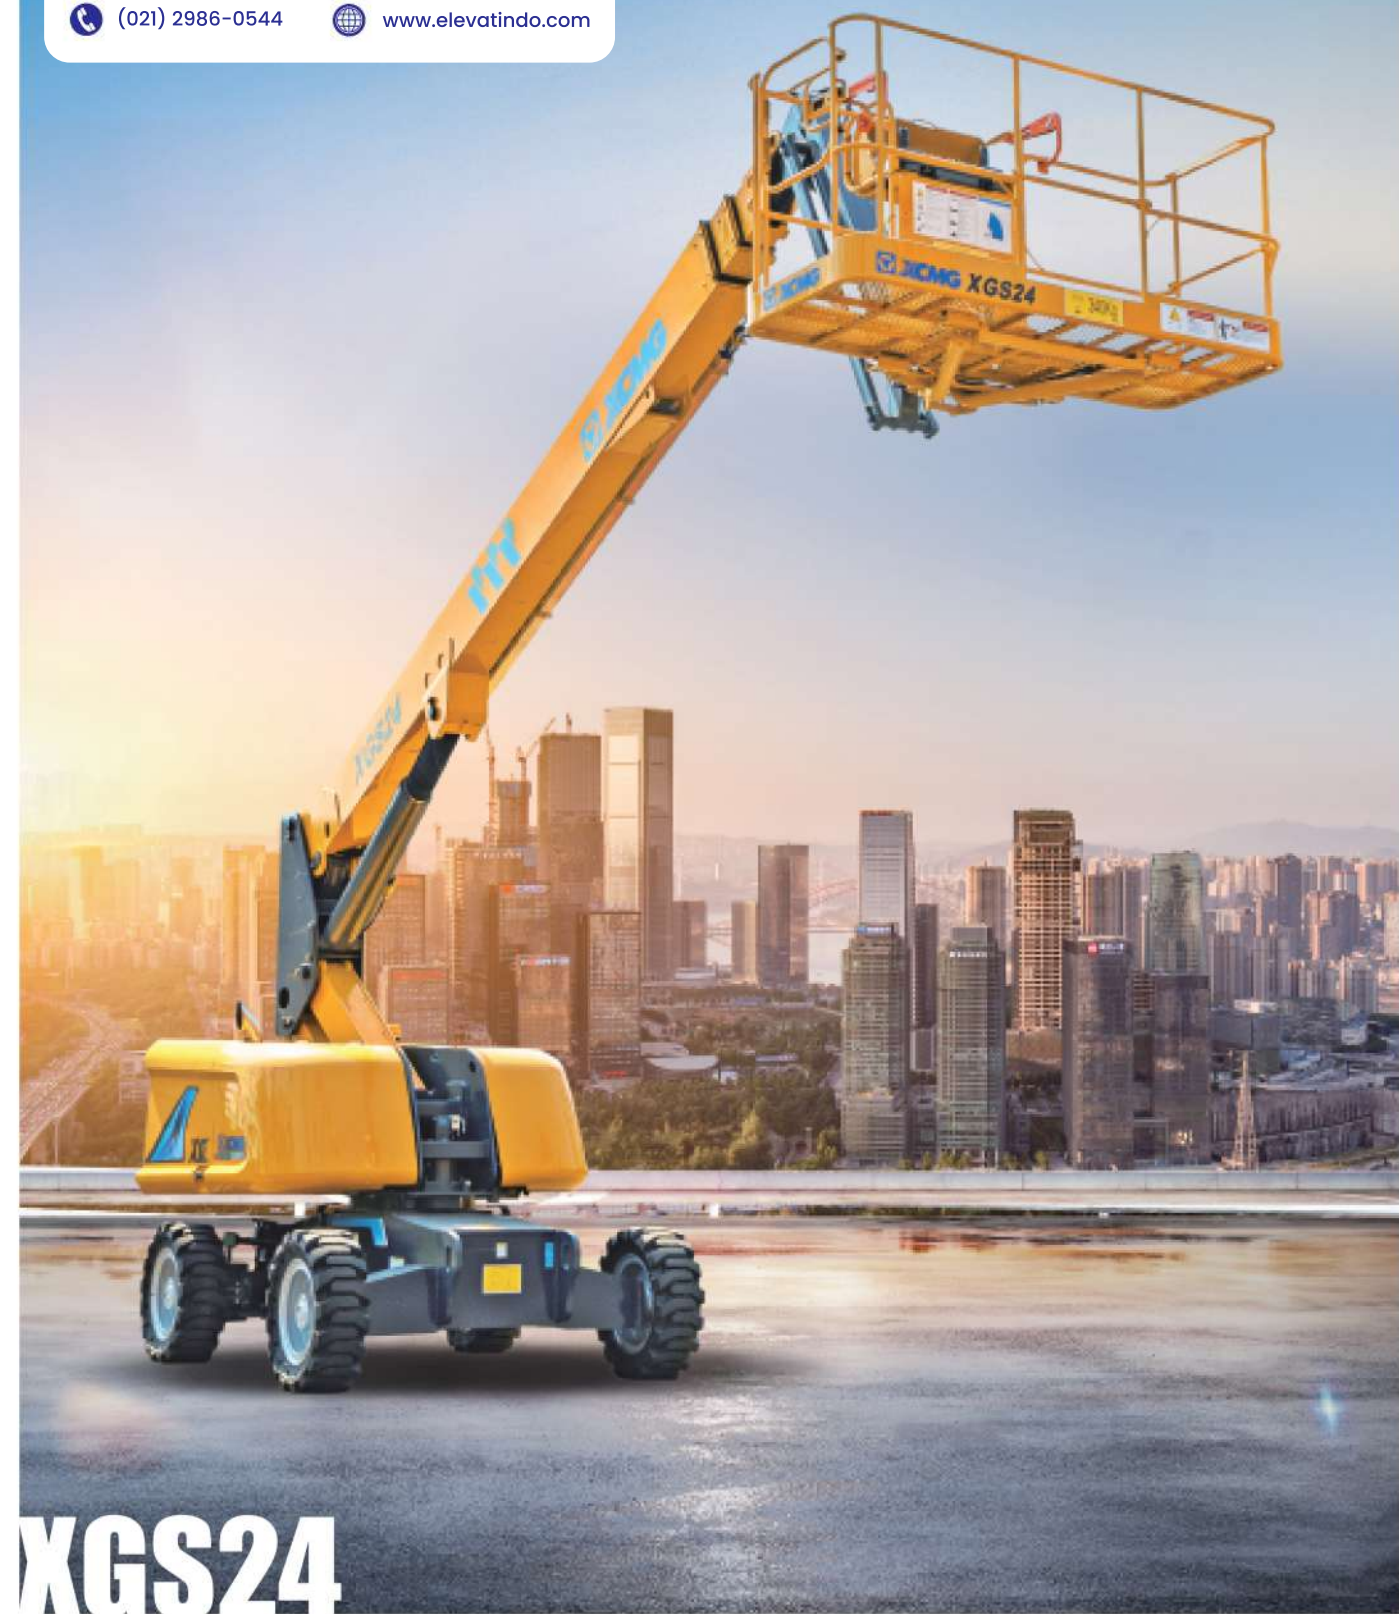

# XGS24

## FEATURES

- 2.4m × 0.9m working platform
- 12V DC auxiliary power
- Engine condition monitoring and starting protection device
- 4WD, 2WS
- Axle balance system
- Emergency power unit
- Automatic platform leveling system
- 360° turntable rotation
- Remote information processing reserved port
- Active defense protection system
- Hydraulic oil cooler
- Anti-bad environmental protection components
- Thumb rocker steering
- Solid rubber tires
- Platform automatic leveling system
- Platform rotation
- Fully proportional Multifunction controls
- Drive enable
- Hourmeter screen
- Tilt alarm
- High/Low speed mode

## OPTIONS

- Foam-filled rough terrain tires
- Tool tray
- Platform working light
- Air line to platform
- AC power to platform

## PARAMETER

| Item                                       | Unit | XGS24                                                      |
|--------------------------------------------|------|------------------------------------------------------------|
| <b>Dimension</b>                           |      |                                                            |
| a Overall length (stowed size)             | mm   | 10150                                                      |
| Overall length (transportation size)       | mm   | 8150                                                       |
| b Overall width                            | mm   | 2490                                                       |
| c Overall height                           | mm   | 2800                                                       |
| Platform dimension                         | mm   | 2400 × 900 × 1150                                          |
| d Wheel base                               | mm   | 2500                                                       |
| Max. working height                        | mm   | 24000                                                      |
| Max. height of platform                    | mm   | 22000                                                      |
| Max. working radius                        | mm   | 18300                                                      |
| <b>Performance</b>                         |      |                                                            |
| Max. working load                          | kg   | 230(Unrestricted)/340(Restricted)                          |
| Max. travel speed (stowed)                 | km/h | 6                                                          |
| Min. travel speed (elevated)               | km/h | 1                                                          |
| Boom luffing range                         | °    | -5~75                                                      |
| Turntable rotation angle                   | °    | 360 continuous                                             |
| Tailswing                                  | mm   | 1550                                                       |
| Platform rotation angle                    | °    | 160                                                        |
| Min. turning radius (outside)              | mm   | 6000                                                       |
| Min. turning radius (inside)               | mm   | 3300                                                       |
| Total weight                               | kg   | 12500                                                      |
| Max. gradeability (counterweight uphill)   | %    | 45                                                         |
| Max. gradeability (counterweight downhill) | %    | 30                                                         |
| <b>Power source</b>                        |      |                                                            |
| Engine model                               | /    | Yuchai YCF3065-T302(Standard) / Perkins 404D-22T(Optional) |
| Engine rated power                         | kW   | 48/43                                                      |
| Hydraulic tank capacity                    | L    | 210                                                        |
| Fuel tank capacity                         | L    | 420                                                        |
| Hydraulic system capacity                  | L    | 170                                                        |

Work Curve Graph

