



(+62) 821-2105-7114 negi@hka.co.id
(021) 2986-0544 www.elevatindo.com



FEATURES

- 2.4m × 0.9m working platform
- 12V DC auxiliary power
- Engine condition monitoring and starting protection device
- 4WD, 4WS
- Axle balance system
- Emergency power unit
- Automatic platform leveling system
- 360° turntable rotation
- Remote information processing reserved port
- Active defense protection system
- Hydraulic oil cooler
- Anti-bad environmental protection components
- Thumb rocker steering
- Platform automatic leveling system
- Platform rotation
- Fully proportional Multifunction controls
- Drive enable
- Hourmeter screen
- Tilt alarm
- High/Low speed mode



OPTIONS

- Tool tray
- Platform working light
- Air line to platform
- AC power to platform
- Solid rubber tires
- Foam-filled tires

PARAMETER

Item	Unit	XGS40K
Dimension		
a Overall length (stowed size)	mm	14060
Overall length (transportation size)	mm	12500
b Overall width	mm	2490(Axle retracted)/3800(Axle extended)
c Overall height	mm	3000
Platform dimension	mm	2400 × 900 × 1150
d Wheel base	mm	3800
Max. working height	mm	40200
Max. height of platform	mm	38200
Max. working radius	mm	24900
Performance		
Max. working load	kg	300(Unrestricted)/460(Restricted)
Max. travel speed (stowed)	km/h	5
Min. travel speed (elevated)	km/h	1
Boom luffing range	°	-6.5~75
Turntable rotation angle	°	360 continuous
Tailswing	mm	2355(Axle retracted)/1700(Axle extended)
Platform rotation angle	°	160
Min. turning radius (outside)	mm	6800(Axle retracted)/5800(Axle extended)
Min. turning radius (inside)	mm	4400(Axle retracted)/2400(Axle extended)
Total weight	kg	21460
Max. gradeability (counterweight uphill)	%	40
Max. gradeability (counterweight downhill)	%	30
Power source		
Engine model	/	Yuchai YC4FA75-T300(Standard) / Cummins QSF2.8t3TC71(Optional)
Engine rated power	kW	55/53
Hydraulic tank capacity	L	260
Fuel tank capacity	L	400
Hydraulic system capacity	L	180

Work Curve Graph

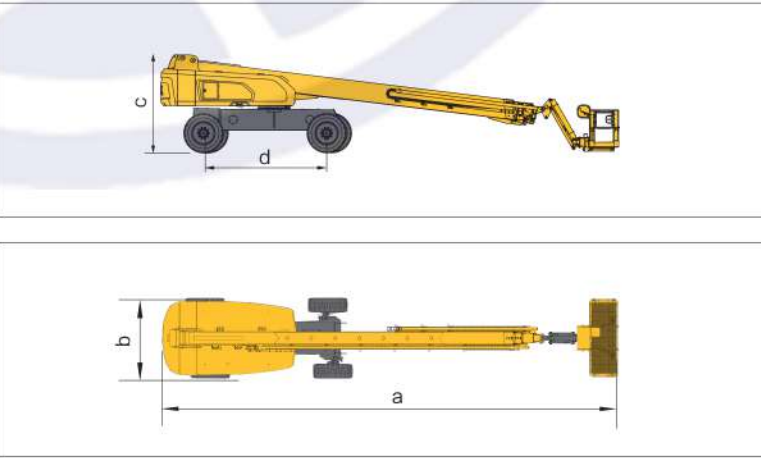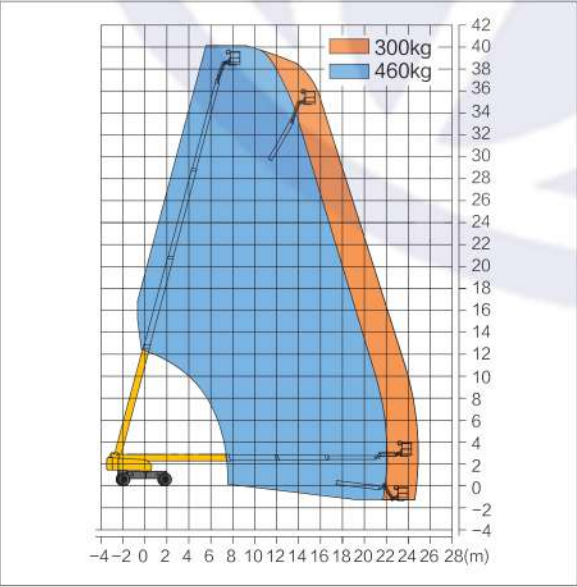

XGS40K