



XGS50K



PT. HASTA KARYA ANANTA
SALES - RENTAL- SERVICE - SPAREPART - TRADE IN

(+62) 821-2105-7114 negi@hka.co.id
(021) 2986-0544 www.elevatindo.com


FEATURES

- 2.4m × 0.9m working platform
- 12V DC auxiliary power
- Engine condition monitoring and starting protection device
- 4WD, 4WS
- X-type outriggers
- Axle balance system
- Emergency power unit
- Automatic platform leveling system
- 360° turntable rotation
- Remote information processing reserved port
- Active defense protection system
- Hydraulic oil cooler
- Anti-bad environmental protection components
- Thumb rocker steering
- Platform automatic leveling system
- Platform rotation
- Fully proportional Multifunction controls
- Drive enable
- Hourmeter screen
- Tilt alarm
- High/Low speed mode

OPTIONS

- Tool tray
- Platform working light
- Air line to platform
- AC power to platform
- Solid rubber tires
- Foam-filled tires

Work Curve Graph

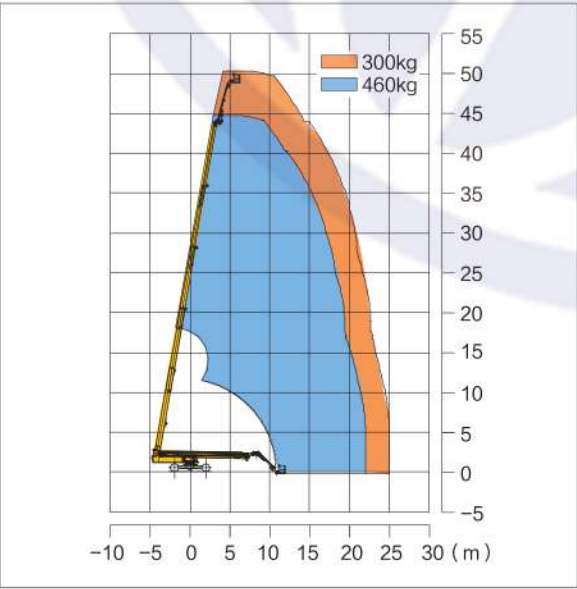

PARAMETER

Item	Unit	XGS50K
Dimension		
a Overall length (stowed size)	mm	17460
Overall length (transportation size)	mm	12550
b Overall width	mm	2490(Axle retracted)/5030(Axle extended)
c Overall height	mm	3000
Platform dimension	mm	2400 × 900 × 1150
d Wheel base	mm	5220(Axle retracted)/4590(Axle extended)
Max. working height	mm	50000
Max. height of platform	mm	48000
Max. working radius	mm	24700
Performance		
Max. working load	kg	300(Unrestricted)/460(Restricted)
Max. travel speed (stowed)	km/h	4.5
Min. travel speed (elevated)	km/h	0.3~0.5
Boom luffing range	°	0~80/~45~75
Turntable rotation angle	°	360 continuous
Tailswing	mm	2000
Platform rotation angle	°	160
Min. turning radius (outside)	mm	9500(Axle retracted)/6600(Axle extended)
Min. turning radius (inside)	mm	7600(Axle retracted)/2800(Axle extended)
Total weight	kg	24440
Max. gradeability (counterweight uphill)	%	45
Max. gradeability (counterweight downhill)	%	30
Power source		
Engine model	/	Yuchai YC4FA85-T300(Standard) / Kubota V3307-CR-TE5AB-XCM2S(Optional)
Engine rated power	kW	62.5/
Hydraulic tank capacity	L	250
Fuel tank capacity	L	420
Hydraulic system capacity	L	200

