

HIGHLIGHTS

- Double driving efficiency.
- Large platform capacity for different working conditions.
- Multi-disc braking, flexible maneuvering

Low Maintenance Cost

- Universal and modular design, easy maintenance.
- Swing out trays of batteries and hydraulic system.
- More durable, stable and safe.

Configurations Standard

- Folding Guardrails
- Emergency Stop
- Hour Meter
- Flashing Beacons
- Self-diagnosis
- Extension Platform
- Safety Arm
- Emergency Descent
- Proportional Control
- Platform Self-lock Door
- Charging Protection
- Pothole Protector
- Automatic Braking System
- Forklift Hole
- Motion Alarm
- Tilt Sensor
- Full Height Drive
- Horn

Optional


- Lead Sensing System
- AC Power to the Platform
- Air Pipe to the Platform



Scissor Lift E-Series

MOBILE ELEVATING WORK PLATFORMS

MODEL	HS0407E	HS0507E	HS0607E	HS0608E
Max. Working Height (In/Out)	m 5,6/0	6,5/0	7,8/7	7,9/7,9
A-Max. Platform Height (In/Out)	m 3,6/0	4,5/0	5,8/5	5,9/5,9
B-Platform Length	m 1,35	1,35	1,63	2,26
C-Platform Width	m 0,7	0,7	0,74	0,81
Extension Size	m 0,6	0,6	0,9	0,9
D-Heights (Rails Up)	m 1,97	2,11	2,17	2,24
Height (Rails Down)	m 1,65	1,77	1,83	1,84
E-Length (with Ladder)	m 1,53	1,53	1,86	2,43
F-Overall Width	m 0,76	0,81	0,76	0,81
G-Wheel Base	m 1,12	1,11	1,32	1,87
H-Clearance (Stowed)	m 0,05	0,05	0,08	0,1
I-Clearance (Raised)	m 0,02	0,02	0,02	0,02
PERFORMANCE				
Platform Capacity	kg 230	230	230	380
Extension Capacity	kg 113	113	113	113
Max. Occupancy (In/Out)	2/0	2/0	2/1	2/1
Max. Drive Speed (Stowed)	km/h 4	4	4	3,5
Drive Speed (Raised)	km/h 0,5	0,5	0,8	0,8
Turning Radius (Out)	m 1,5	1,7	1,55	2,1
Up/Down Time	s 25/25	25/20	16/34	30/34
Gradeability	% 25	25	25	30
Max. Slope	(°) 1,5/3	1,5/3	1,5/3	1,5/3
Control	Switch	Proportional	Proportional	Proportional
Drive	FWD	FWD	FWD	FWD
Multi Disc Brake	Rear	Rear	Front	Front
Tires	mm 230x80	305/100	305/100	381/127
Max. Wind Speed	m/s /	/	12,5	12,5
POWER				
Batteries	V/Ah 24/85	24/100	24/200	24/200
Charger	VAC/A 100-240/6,3	100-240/6,3	100-240/10	100-240/10
WEIGHTS				
Total Weight	kg 880	995	1573	2050

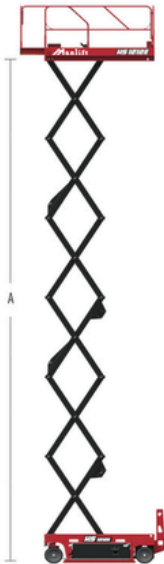

Scissor Lift E-Series

MOBILE ELEVATING WORK PLATFORMS

MODEL	HS0808E	HS0812E	HS1012E	HS1212E	HS1413E
Max. Working Height (In/Out)	m 9,9/8	9,8/9,8	11,8/11,8	13,8/9,5	15,7/10
A-Max. Platform Height (In/Out)	m 7,9/6	7,8/7,8	9,8/9,8	11,8/7,5	13,7/8
B-Platform Length	m 2,26	2,26	2,26	2,26	2,64
C-Platform Width	m 0,81	1,12	1,12	1,12	1,12
Extension Size	m 0,9	0,9	0,9	0,9	0,9
D-Heights (Rails Up)	m 2,36	2,36	2,51	2,62	2,62
Height (Rails Down)	m 1,96	1,83	1,96	2,09	2,1
E-Length (with Ladder)	m 2,43	2,49	2,49	2,49	2,84
F-Overall Width	m 0,81	1,18	1,18	1,19	1,25
G-Wheel Base	m 1,87	1,87	1,87	1,87	2,22
H-Clearance (Stowed)	m 0,1	0,1	0,1	0,1	0,1
I-Clearance (Raised)	m 0,02	0,02	0,02	0,02	0,02
PERFORMANCE					
Platform Capacity	kg 230	450	320	320	250
Extension Capacity	kg 113	113	113	113	113
Max. Occupancy (In/Out)	2/1	2/1	2/1	2/1	02-Jan
Max. Drive Speed (Stowed)	km/h 3,5	3,5	3,5	3,5	3,5
Drive Speed (Raised)	km/h 0,8	0,8	0,8	0,8	0,8
Turning Radius (Out)	m 2,2	2,3	2,3	2,3	2,3
Up/Down Time	s 31/40	35/40	62/39	65/60	80/60
Gradeability	% 25	25	25	25	25
Max. Slope	(°) 1,5/3	1,5/3	1,5/3	1,5/3	1,5/3
Control	Proportional	Proportional	Proportional	Proportional	Proportional
Drive	FWD	FWD	FWD	FWD	FWD
Multi Disc Brake	Front	Front	Front	Front	Front
Tires	mm 381x127	381x127	381x127	381x127	381x127
Max. Wind Speed	m/s 12,5	12,5	12,5	1,25	12,5
POWER					
Batteries	V/Ah 24/200	24/200	24/200	24/200	24/200
Charger	VAC/A 100-240/10	100-240/10	100-240/10	100-240/10	100-240/10
WEIGHTS					
Total Weight	kg 2257	2580	2840	3045	3530



PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN

Tel: +62 21-2986-0544, 45

Email: manlift@hka.co.id

Website: www.manlift.co.id

Add: Jl. Benteng Betawi, RT.001/RW.015,

Tanah Tinggi Kec. Tangerang, Kota Tangerang

Banten 15119, Indonesia