

HIGHLIGHTS

- Optimized matching, high cycle times, better endurance.
- Precise control greatly improves the smoothness of operation.
- Large ground clearance, stronger passability.

Low Maintenance Cost

- Universal and modular design, easy maintenance.
- Swing out trays of batteries and hydraulic system.
- More durable, stable and safe.

Configurations Standard

- Folding Guardrails
- Emergency Stop
- Hour Meter
- Flashing Beacons
- Self-diagnosis
- Extension Platform
- Safety Arm
- Emergency Descent
- Proportional Control
- Platform Self-lock Door
- Charging Protection
- Pothole Protector
- Automatic Braking System
- Forklift Hole
- Motion Alarm
- Tilt Sensor
- Full Height Drive
- Horn

Optional


- Lead Sensing System
- AC Power to the Platform
- Air Pipe to the Platform



Scissor Lift H-Series

MOBILE ELEVATING WORK PLATFORMS

MODEL	HS0507H	HS0607H	HS0608H	HS0808H
Max. Working Height (In/Out)	6,5m/0m	7,8m/7m	7,9m/7,9m	9,9m/8m
A-Max. Platform Height (In/Out)	4,5m/0m	5,8m/5m	5,9m/5,9m	7,9m/6m
B-Platform Length	1,35m	1,63m	2,26m	2,26m
C-Platform Width	0,7m	0,74m	0,81m	0,81m
Extension Size	0,6m	0,9m	0,9m	0,9m
D-Heights (Rails Up)	2,1m	2,17m	2,24m	2,36m
Height (Rails Down)	1,74m	1,83m	1,84m	1,96m
E-Length (with Ladder)	1,60m	1,8m	2,43m	2,43m
F-Overall Width	0,76m	0,76m	0,81m	0,81m
G-Wheel Base	1,17m	1,32m	1,87m	1,87m
H-Clearance (Stowed)	0,05m	0,06m	0,1m	0,1m
I-Clearance (Raised)	0,02m	0,02m	0,02m	0,02m
PERFORMANCE				
Platform Capacity	230kg	230kg	380kg	230kg
Extension Capacity	113kg	113kg	113kg	113kg
Max. Occupancy (In/Out)	2/0	2/1	2/1	2/1
Max. Drive Speed (Stowed)	3,5km/h	4km/h	3,5km/h	3,5km/h
Drive Speed (Raised)	0,8km/h	0,8km/h	0,8km/h	0,8km/h
Turning Radius (Out)	1,60m	1,55m	2,1m	2,1m
Up/Down Time	25/20s	16/34s	30/34s	31/40s
Gradeability	25%	25%	25%	25%
Max. Slope	1,5°/3°	1,5°/3°	1,5°/3°	1,5°/3°
Control	Switch	Proportional	Proportional	Proportional
Drive	FWD	FWD	FWD	FWD
Multi Disc Brake	Rear	Rear	Rear	Rear
Tires (mm)	305x100	305x100	305x127	305x127
Max. Wind Speed	/	12,5m/s	12,5m/s	12,5m/s
PERFORMANCE				
Batteries (V/Ah)	24V/100Ah	24V/200Ah	24V/200Ah	24V/200Ah
Charger	100-240VAC/10A	100-240VAC/10A	100-240VAC/10A	100-240VAC/10A
WEIGHT				
Total Weight	995kg	1560kg	2050kg	2240kg

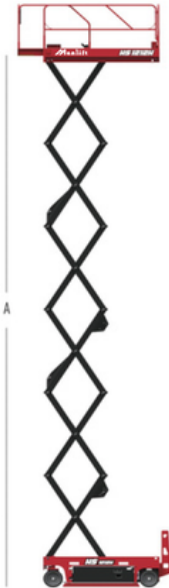

Scissor Lift H-Series

MOBILE ELEVATING WORK PLATFORMS

MODEL	HS0812H	HS1012H	HS1212H	HS1413H
Max. Working Height (In/Out)	9,8m/9,8m	11,8m/11,8m	13,8m/9,5m	15,7m/10m
A-Max. Platform Height (In/Out)	7,8m/7,8m	9,8m/9,8m	11,8m/7,5m	13,7m/8m
B-Platform Length	2,26m	2,26m	2,26m	2,26m
C-Platform Width	1,12m	1,12m	1,12m	1,12m
Extension Size	0,9m	0,9m	0,9m	0,9m
D-Heights (Rails Up)	2,36m	2,51m	2,62m	2,62m
Height (Rails Down)	1,83m	1,96m	2,09m	2,1m
E-Length (with Ladder)	2,49m	2,49m	2,49m	2,84m
F-Overall Width	1,18m	1,18m	1,19m	1,25m
G-Wheel Base	1,87m	1,87m	1,87m	2,22m
H-Clearance (Stowed)	0,1m	0,1m	0,1m	0,1m
I-Clearance (Raised)	0,02m	0,02m	0,02m	0,02m
PERFORMANCE				
Platform Capacity	450kg	320kg	320kg	250kg
Extension Capacity	113kg	113kg	113kg	113kg
Max. Occupancy (In/Out)	2/1	2/1	2/1	2/1
Max. Drive Speed (Stowed)	3,5km/h	3,5km/h	3,5km/h	3,5km/h
Drive Speed (Raised)	0,8km/h	0,8km/h	0,8km/h	0,8km/h
Turning Radius (Out)	2,3m	2,3m	2,3m	2,3m
Up/Down Time	35/40s	62/39s	65/60s	80/60s
Gradeability	25%	25%	25%	25%
Max. Slope	1,5°/3°	1,5°/3°	1,5°/3°	1,5°/3°
Control	Proportional	Proportional	Proportional	Proportional
Drive	FWD	FWD	FWD	FWD
Multi Disc Brake	Rear	Rear	Rear	Rear
Tires (mm)	305x127	305x127	305x127	305x127
Max. Wind Speed	12,5m/s	12,5m/s	12,5m/s	12,5m/s
PERFORMANCE				
Batteries (V/Ah)	24V/200Ah	24V/200Ah	24V/200Ah	24V/300Ah
Charger	100-240VAC/10A	100-240VAC/10A	100-240VAC/10A	100-240VAC/10A
WEIGHT				
Total Weight	2550kg	2840kg	3020kg	3530kg



PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN

Tel: +62 21-2986-0544, 45

Email: manlift@hka.co.id

Website: www.manlift.co.id

Add: Jl. Benteng Betawi, RT.001/RW.015,

Tanah Tinggi Kec. Tangerang, Kota Tangerang

Banten 15119, Indonesia