

HIGHLIGHTS

- Strong off-road performance.
- Rough terrain tyre, large ground clearance, and strong passability.
- The engine drive is more powerful.

Configurations Standard

Automatic Braking System	Hour Meter
Proportional Control	Platform Self-lock Door
Emergency Descent	Self-diagnosis
Emergency Stop	Flashing Beacons
Extension Platform	Tilt Sensor
Folding Guardrails	Safety Arm
Motion Alarm	Outriggers
	Horn

Optional


Working Lamp on the Platform
Load Sensing System
AC Power to the Platform
Air Pipe to the Platform



Engine Rough Terrain Lift

MOBILE ELEVATING WORK PLATFORMS

MODEL	HS1623RT	
Max. Working Height	m	17,95
A-Max. Platform Height	m	15,95
Platform Dimension (B x C)	m	3,81 x 1,83
Front Platform Extension Length	m	1,536
Rear Platform Extension Length	m	1,231
D-Heights (Rails Up)	m	3,21
Height (Rails Down)	m	2,44
E-Overall Length (With Ladder)	m	4,88
Overall Width (With Outrigger)	m	2,29
F-Ground Clearance	m	0,26
G-Wheel Base	m	2,862
PERFORMANCE		
Platform Capacity	kg	680
Extension Capacity	kg	230
Max. Occupancy (In/Out)		4/4
Drive Height	m	8,5
Max. Drive Speed (Stowed)	km/h	6,1
Drive Speed (Raised)	km/h	1,1
Up/Down Time	s	55/65
Turning Radius (Out)	m	3,9
Tilt Rating (Front to Rear/Side to Side)	(°)	3/2
Gradeability	%	40
Max. Outrigger Leveling (Front to Rear)	(°)	7
Max. Outrigger Leveling (Side to Side)	(°)	12
Tires	mm	33 x 12-20
Max. Wind Speed	km/h	12,5
POWER		
Engine		Kubota V2403
Drive		Four-Wheel Drive
Fuel Tank Capacity	L	120
Hydraulic Oil Tank Capacity	L	120
WEIGHTS		
Total Weight	kg	7980

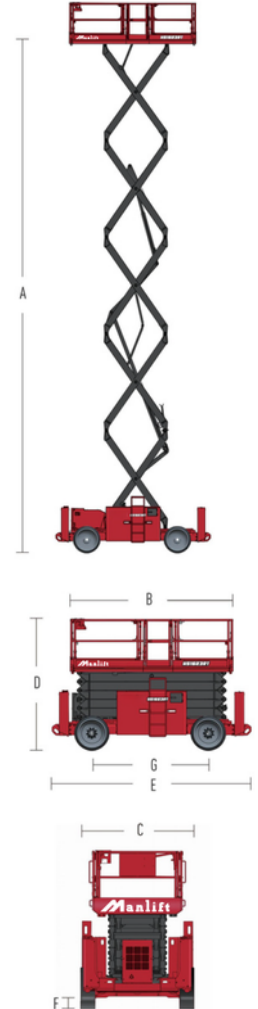

PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN

Tel: +62 21-2986-0544, 45

Email: manlift@hka.co.id

Website: www.manlift.co.id

Addr: Jl. Benteng Betawi, RT.001/RW.015,

Tanah Tinggi Kec. Tangerang, Kota Tangerang

Banten 15119, Indonesia



ALWAYS LIFTING ALWAYS GROWING

HIGHLIGHTS

- All-terrain and all-road driving.
- Off-road tires with large ground clearance, high gradeability, and strong passability.
- AC motor drive, smooth driving, low noise and excellent inching motion.
- Large capacity batteries, better endurance.

Configurations Standard

Automatic Braking System
Emergency Stop
Flashing Beacons
Proportional Control
Emergency Decant System
Folding Guardrails
Safety Access Support Bar
Hour Meter
Charging Protection System
Motion Alarm
Horn

Optional



Load Sensing System
AC Power to the Platform



Electric Rough Terrain Lift

MOBILE ELEVATING WORK PLATFORMS

MODEL		HS1218ERT	HS2025ERT
Max. Working Height	m	14	22
A-Max. Platform Height	m	12	20
B-Platform Length	m	2,92	4,45
C-Platform Width	m	1,65	2,39
Extension Size	m	0,65 (Double Side)	2,7
D-Heights (Rails Up)	m	2,88	3,95
Height (Rails Down)	m	2,1	3,1
E-Overall Length (With Ladder)	m	3,75	4,94
F-Overall Width	m	1,75	2,47
G-Wheel Base	m	2,3	3,2
H-Ground Clearance	m	0,2	0,4
PERFORMANCE			
Platform Capacity	kg	360	750
Extension Capacity	kg	113	750
Max. Occupancy (In/Out)		3/2	4/4
Max. Drive Speed (Stowed)	km/h	4,8	5
Drive Speed (Raised)	km/h	0,6	0,4
Turning Radius (In)	m	2,29	1,5
Turning Radius (Out)	m	4,88	3,4
Up/Down Time	s	54/50	91/75
Gradeability	%	45	30
Max. Slope	(°)	2/3	2/3
Control		Proportional Control	Proportional Control
Drive		Four-Wheel Drive	Four-Wheel Drive
Multi Disc Brake		Four-Wheel Drive	Four-Wheel Drive
Tires	mm	26 x 12-16	36 x 14-20
Max. Wind Speed	km/h	12,5	12,5
POWER			
Batteries	V/Ah	48/370	48/620
Charger	VAC/A	100-240/13,5	100-240/16
WEIGHTS			
Total Weight	kg	5730	14550

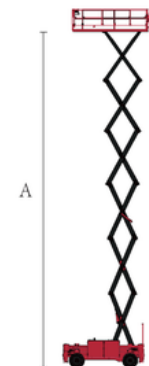

PT. HASTA KARYA ANANTA

SALES - RENTAL - SERVICE - SPAREPART - TRADE IN

Tel: +62 21-2986-0544, 45
Email: manlift@hka.co.id
Website: www.manlift.co.id

Addr: Jl. Benteng Betawi, RT.001/RW.015,
Tanah Tinggi Kec. Tangerang, Kota Tangerang
Banten 15119, Indonesia