



(+62) 821-2105-7114 negi@hka.co.id
(021) 2986-0544 www.elevatindo.com




XG1523RT XG1823RT

FEATURES

- Outrigger leveling system
- Two-way extension platform
- Four-wheel drive
- Hydraulic oil cooling system

OPTIONS

- Overload alarm system
- Axle balancing system

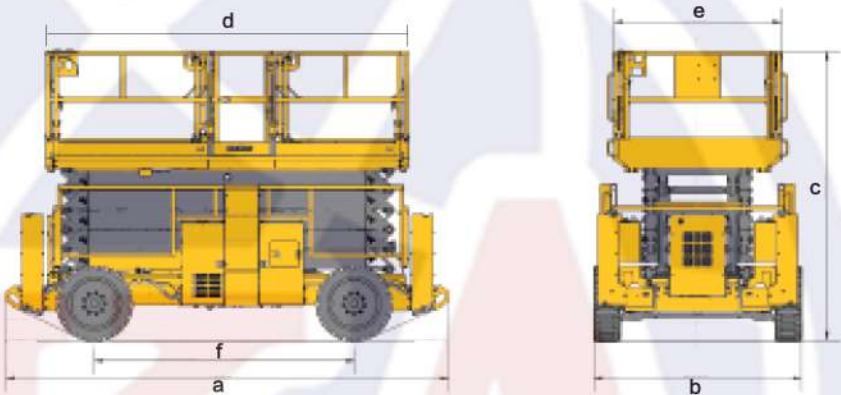

PARAMETER			
Item	Unit	XG1523RT	XG1823RT
Dimension			
Max. working height	m	15	18
Max. height of platform	m	13	16
a Overall length	mm	4860	4860
b Overall width	mm	2286	2286
c Overall height	mm	2950	3170
Overall height (stowed)	mm	2290	2510
Platform dimension	mm	3980 × 1830	3980 × 1830
Platform dimension (extend)	mm	6570 × 1830	6570 × 1830
Min. ground clearance	mm	253	253
Tire	/	33 × 12-20	33 × 12-20
f Wheel base	mm	2850	2850
Performance			
Total weight	kg	7250	8000
Max. workers	/	7	4
Carrying weight	kg	680	680
Carrying weight (extend)	kg	230	230
Travel speed (low/high)	km/h	6.1/1.1	6.1/1.1
Min.turning radius (inside/outside)	m	2.5/5.6	2.5/5.6
Power source			
Engine	/	Kubota V2403-M-DI	Kubota V2403-M-DI
Engine rated power	kW	36	36
Hydraulic tank capacity	L	115	115
Fuel tank capacity	L	115	115